

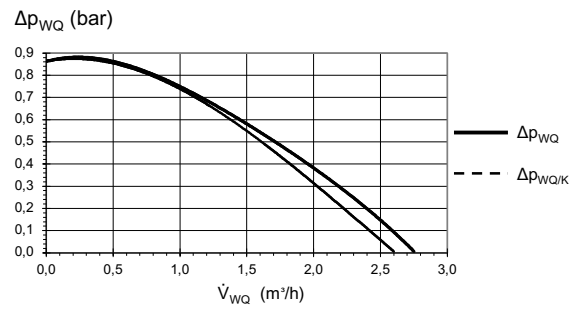
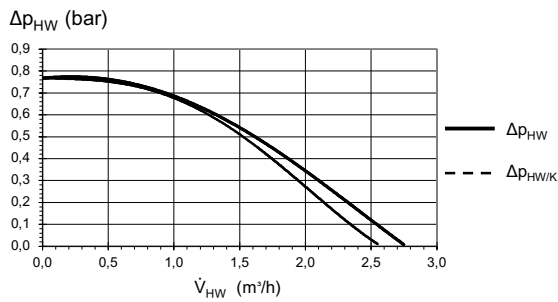
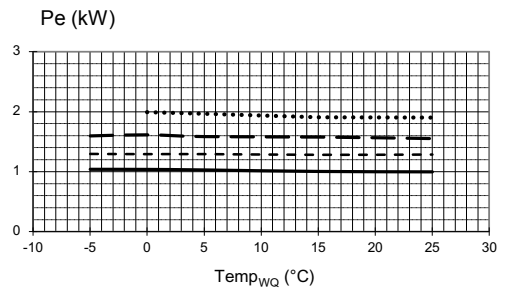


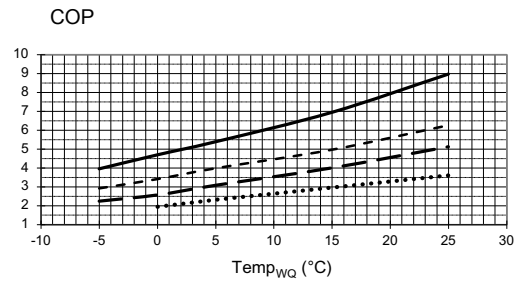

Performance curves

WZS 42(H)(K)3M

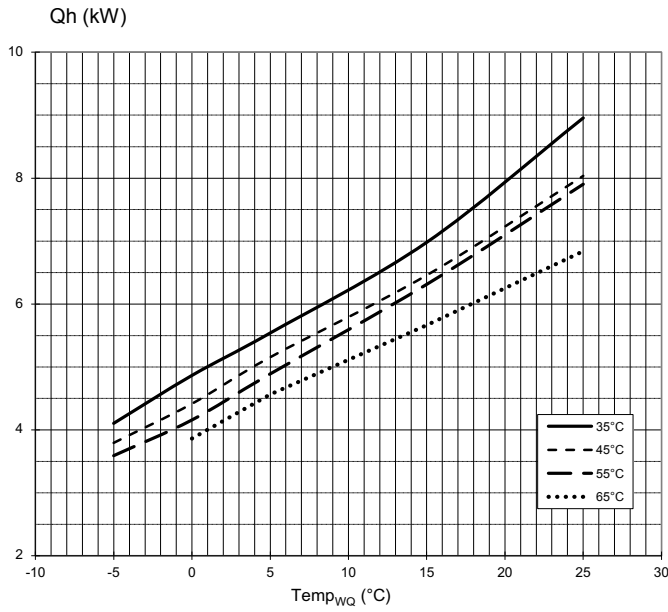






823234

- Key: DE823000L/170408
- \dot{V}_{HW} Heating water volume flow rate
 - \dot{V}'' Heat source volume flow rate
 - $Temp_{WQ}$ Heat source temperature
 - Q_h Heating capacity
 - P_e Power consumption
 - COP Coefficient of performance
 - $\Delta p_{HW} / \Delta p_{HW/K}$ Heating circuit free pressure / Heating circuit with cooling free pressure
 - $\Delta p_{WQ} / \Delta p_{WQ/K}$ Heat source free pressure / Heat source with cooling free pressure



WZS 62(H)(K)3M

Performance curves

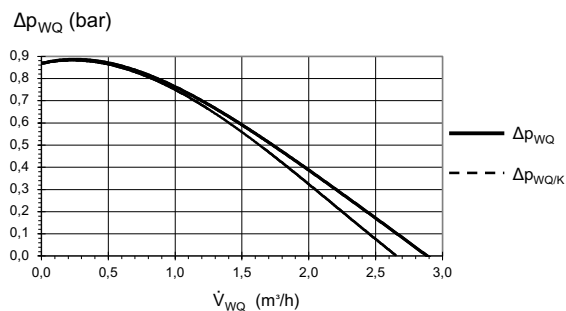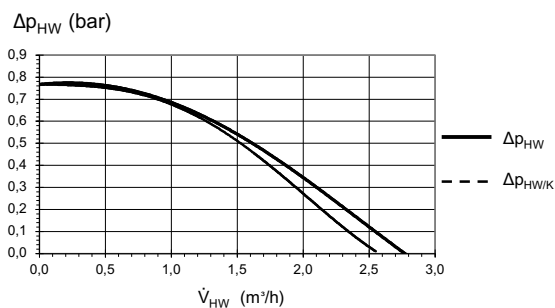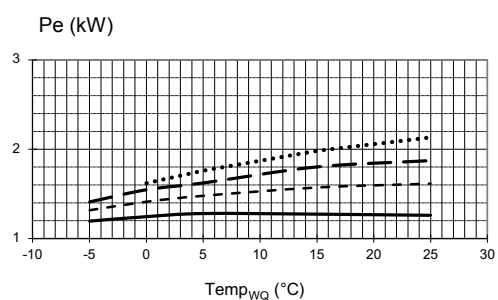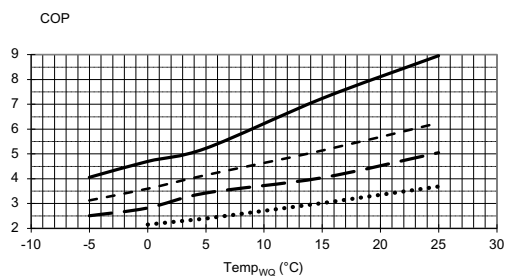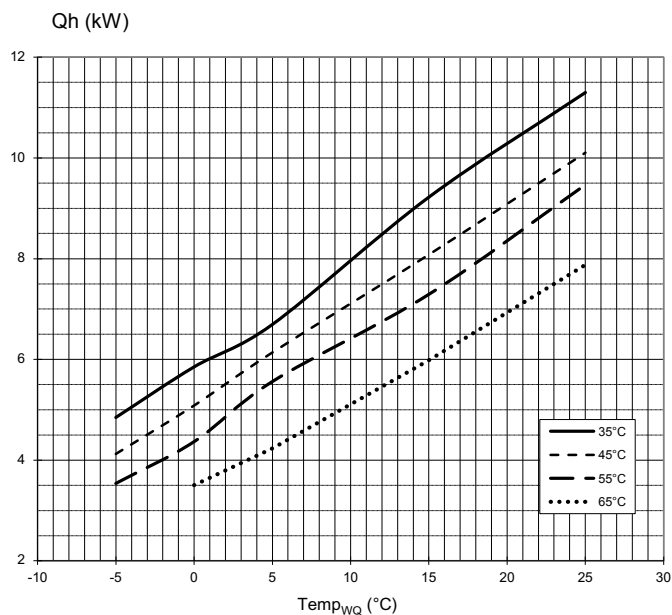






823235

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{wQ}$	Heat source temperature
Q_h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{wQ} / \Delta p_{wQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

WZS 82(H)(K)3M

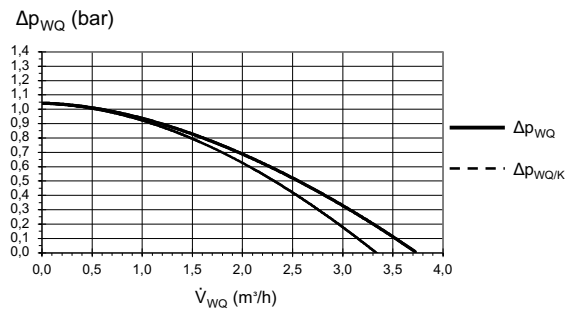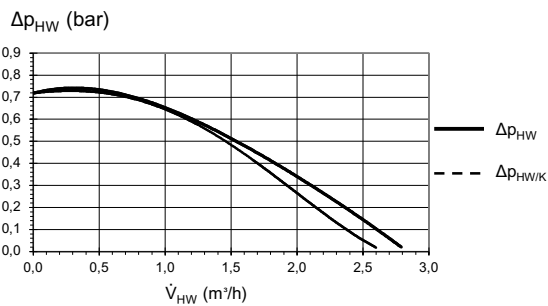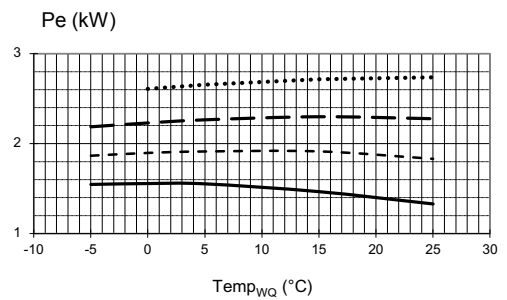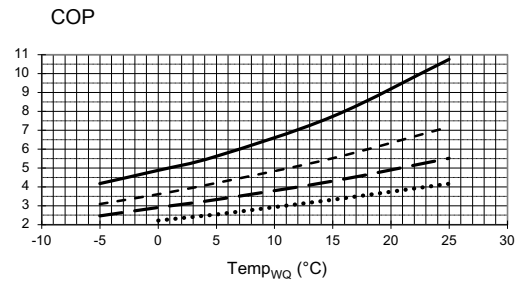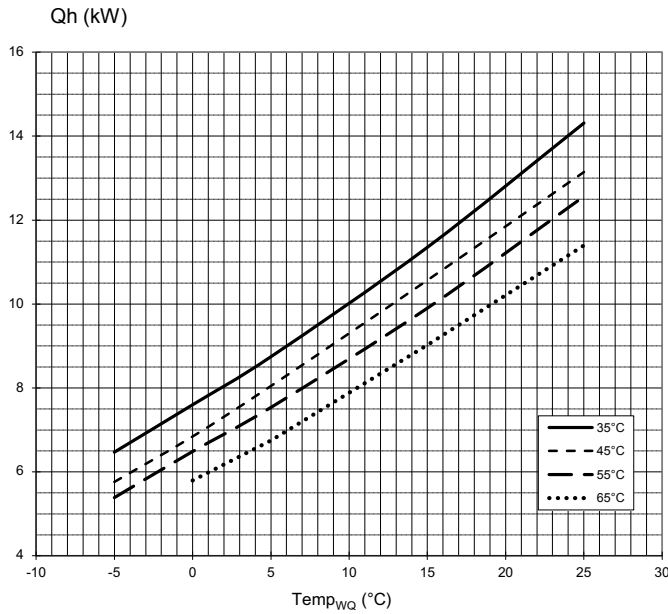






823236

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{WQ}$	Heat source temperature
Q_h	Heating capacity
P_e	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



WZS 102(H)(K)3M

Performance curves

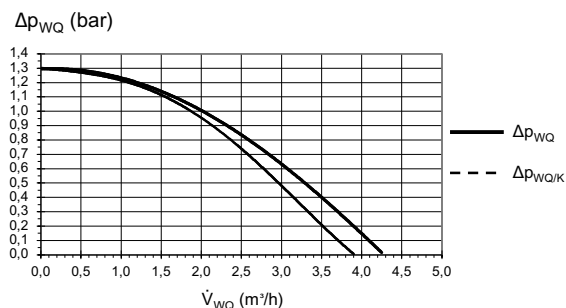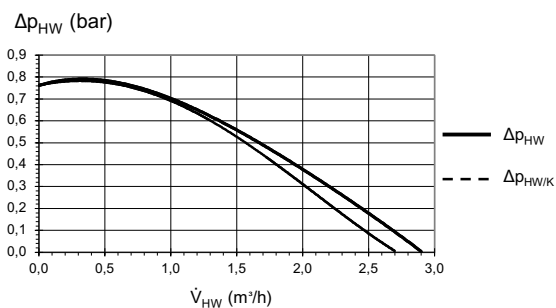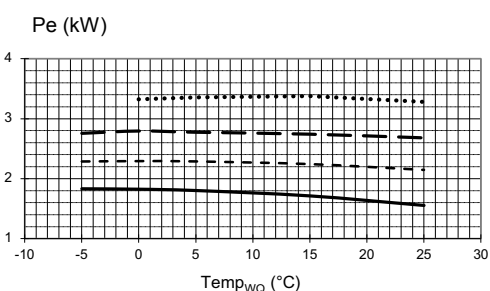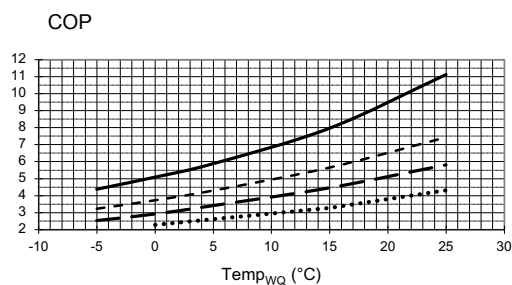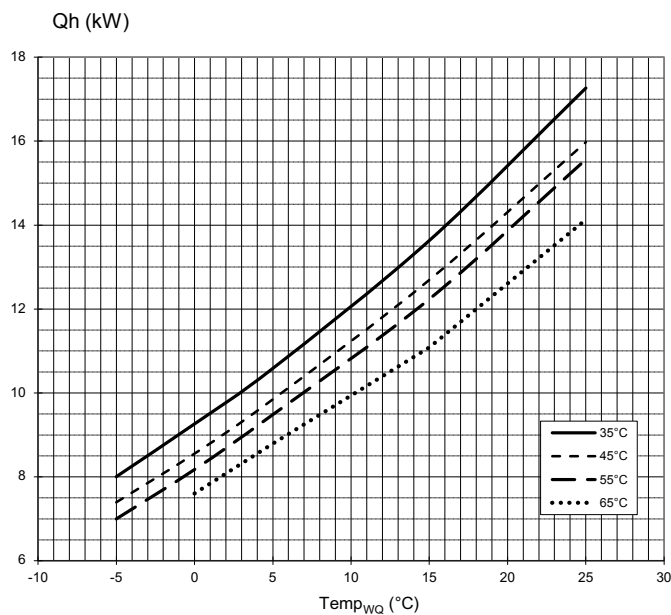






823327

Key:	DE823000L/170408
\dot{V}_{HW}	Heating water volume flow rate
\dot{V}''	Heat source volume flow rate
$Temp_{WQ}$	Heat source temperature
Q_h	Heating capacity
Pe	Power consumption
COP	Coefficient of performance
$\Delta p_{HW} / \Delta p_{HW/K}$	Heating circuit free pressure / Heating circuit with cooling free pressure
$\Delta p_{WQ} / \Delta p_{WQ/K}$	Heat source free pressure / Heat source with cooling free pressure



Performance curves

WZS 122(H)(K)3M

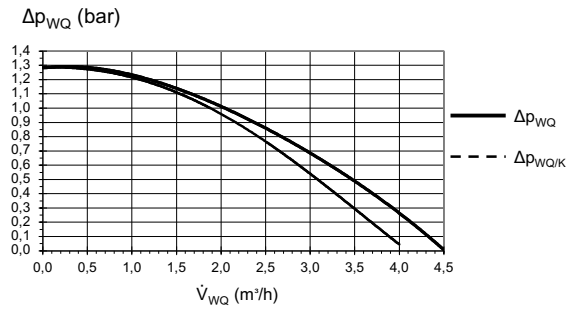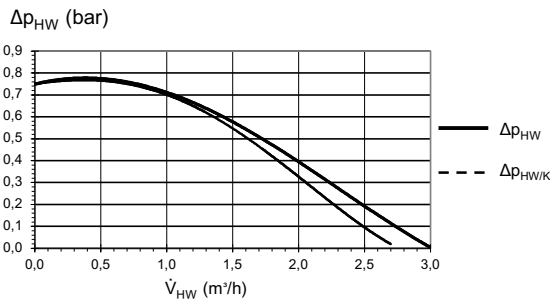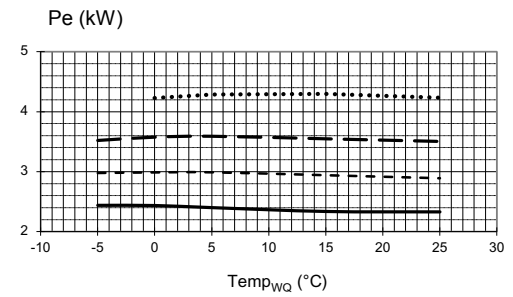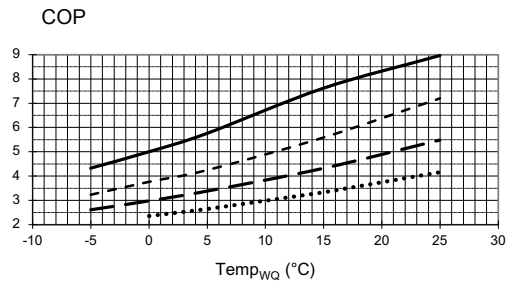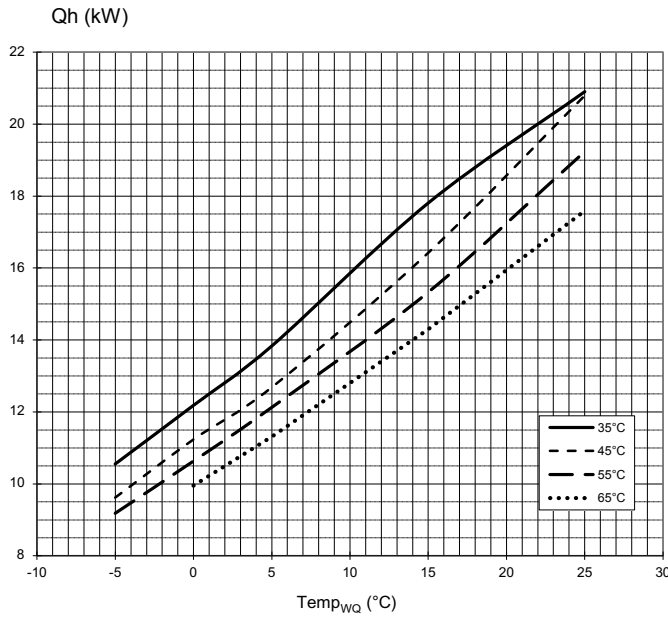

823238

- Key: DE823000L/170408
- \dot{V}_{HW} Heating water volume flow rate
 - \dot{V}'' Heat source volume flow rate
 - $Temp_{WQ}$ Heat source temperature
 - Q_h Heating capacity
 - Pe Power consumption
 - COP Coefficient of performance
 - $\Delta p_{HW} / \Delta p_{HW/K}$ Heating circuit free pressure / Heating circuit with cooling free pressure
 - $\Delta p_{WQ} / \Delta p_{WQ/K}$ Heat source free pressure / Heat source with cooling free pressure