





# WITA

## go.future Z

### Product advantages

- 5 years warranty
- Anti-block function
- Low power consumption 2.5 - 7.5 W
- 3 constant speed modes
- Compact design
- Ceramic bearings

### Technical data

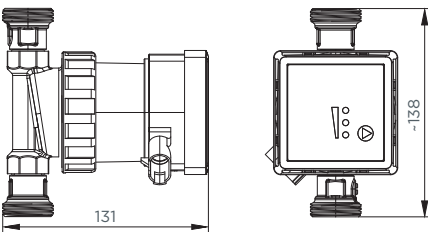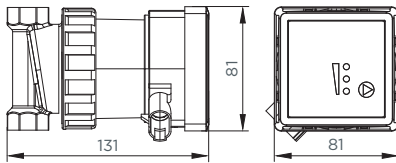

All product dimensions are presented in mm.

|                         |                                       |
|-------------------------|---------------------------------------|
| Maximum delivery head   | 1.4 m                                 |
| Maximum flow rate       | 650 l/h                               |
| Power consumption       | 2.5 - 7 W                             |
| Regulation              | 3 constant speed modes                |
| Additional functions    | Anti-block function                   |
| Supply voltage          | 1 x 230 V, 50 Hz                      |
| Motor protection        | no external motor protection required |
| Protection rating       | IP 44                                 |
| Ambient temperature     | 0 °C to +40 °C                        |
| Media temperature       | +5 °C to +65 °C                       |
| Temperature class       | TF 60 according to EN 60335-2-51      |
| Maximum system pressure | 10 bars                               |
| Connection sizes        | DN 15 (Rp 1/2")                       |
| Pump housing material   | brass                                 |
| Weight incl. insulation | 1.2 kg                                |

Available separately as an accessory



**Art. No:**  
**A 32 500**

Characteristic WITA go.future Z

